

# SNAP<sup>®</sup>

## Laboratory Glass Columns

*"Next Generation" technology for high-performance preparative chromatography*



# Table of Contents

---

Introducing the SNAP® Column.....	1
Advantages of SNAP® Column.....	2
Bed Length/Volume Selection Chart .....	3
Pressure/Material Specifications .....	4
Part Numbering System .....	5
SNAP® Series Glass Columns, AB-Version, Fixed/Short Plungers (F/S).....	6
SNAP® Series Glass Columns, AB-Version, Fixed/Long Plungers (F/L) .....	7
SNAP® Series Glass Columns, AB-Version, Short/Short Plungers (S/S).....	8
SNAP® Series Glass Columns, AB-Version, Short/Long Plungers (S/L) .....	9
SNAP® Series Glass Columns, AB-Version, Long/Long Plungers (L/L).....	10
SNAP® Series Glass Columns, SR-Version, Fixed/Short Plungers (F/S) .....	11
SNAP® Series Glass Columns, SR-Version, Fixed/Long Plungers (F/L).....	12
SNAP® Series Glass Columns, SR-Version, Short/Short Plungers (S/S) .....	13
SNAP® Series Glass Columns, SR-Version, Short/Long Plungers (S/L).....	14
SNAP® Series Glass Columns, SR-Version, Long/Long Plungers (L/L) .....	15
Packing Adapters .....	16
Supplied Accessories/Spare Parts .....	17-18
Cartridge Configurations/Customized Solutions.....	19

## OUR MISSION STATEMENT

---

*To be a "world class" provider of products and services to Life Sciences for the advancement of research, development and production of materials for the good of mankind.*

---

## SNAP® Series Glass Columns


### Introducing the SNAP® Glass Column

Liquid preparative chromatography is a widely used downstream purification technique that can be used on a wide range of compounds. The common targeted molecules include proteins, peptides and/or nucleic acids. With the emergence of smaller particle, higher performance chromatography media, there has been an identified need for higher pressure column hardware that can handle the increased back pressure loading in a safe column configuration. Traditionally, this has been addressed with stainless steel hardware, which does not allow the scientist visibility of the column contents.

Essential Life Solutions designed a "Next Generation" column line to address these evolving demands. Drawing on its many years of experience, Essential Life is pleased to announce the most effective and user friendly preparative column on the market.

SNAP® columns have been designed to exceed what is currently available to the scientist for laboratory use. Essential Life understands the value that the scientist places on his or her results, and we have strived to help them achieve those goals.

Careful choice in materials of construction, combined with customer feedback, has driven the design such that biocompatibility can be achieved in virtually any circumstance. Essential Life proudly offers this new SNAP® column hardware line and appreciates your interest. We at Essential Life Solutions value your business.

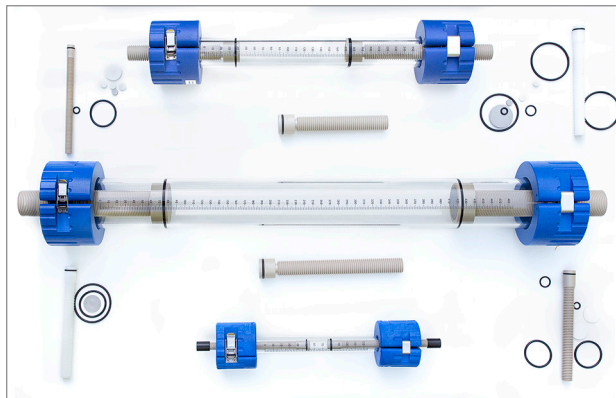

The patented SNAP® closure mechanism provides a safe and reliable means to access the column contents.

## Advantages of SNAP® Glass Columns

### 1 HIGHER PRESSURE RATINGS INCORPORATING GLASS CONSTRUCTION

Pressures to 40 Bars (580 psig)  
Full view of bed unlike stainless steel  
Rugged construction for hard lab use

### 2 LINEAR MOTION OF PISTON

Due to the true linear motion of piston there is NO scraping of the bed surface or induced TORSIONAL load imposed on the packed bed assuring true linear compression.

### 3 CALIBRATED GLASS TUBING

Superior glass tolerance eliminates seal adjustment.  
True bore tubing reduces wall effect

### 4 TRUE FRITS

Columns are supplied with true sintered material frits assuring good flow distribution and minimize dead volume.

### 5 ROBUST INLET AND OUTLET CONNECTIONS

Connections are made externally and are visible if any leakage should occur.

### 6 FINE THREAD ADJUSTMENT

Columns are provided with fine thread adjustment allowing better and more precise piston control.

### 7 DOUBLE PISTON ADJUSTMENT

Columns are provided with piston adjustment from both ends allowing greater flexibility of bed adjustments.

### 8 QUICK RELEASE ENDS

ELS (patented) column end closure design allows easy assembly and dis-assembly of columns even on large diameters. Inherently self locking design ensures user safety.

### 9 GRADUATED GLASS

All columns are supplied with column graduations on the glass exterior to make bed measurements quick and simple.

### 10 CONFIGURABLE

Columns can be custom configured based on mobile phase conditions and meet the exact needs of the chromatographer.

## Bed Length/Volume Selection Chart

Column ID (mm)	Bed Length (mm)	Fixed/Short (FS) Piston Bed Length min-max (mm)	Fixed/Short (FS) Piston Volume min-max (ml)	Fixed/Long (FL) Piston Bed Length min-max (mm)	Fixed/Long (FL) Piston Volume min-max (ml)
10mm	125mm	62.94-125	4.941-9.813	20.44-125	1.604-9.813
	250mm	187.9-250	14.75-19.63	145.4-250	11.42-19.63
	500mm	437.9-500	34.38-39.25	395.4-500	31.04-39.25
	750mm	687.9-750	54-58.88	645.4-750	50.67-58.88
	1000mm	937.9-1000	73.63-78.5	895.3-1000	70.28-78.5
15mm	125mm	47.63-125	8.413-22.08	5.13-125	0.906-22.08
	250mm	172.6-250	30.49-44.16	130.1-250	22.98-44.16
	500mm	422.6-500	74.65-88.31	380.1-500	67.14-88.31
	750mm	672.6-750	118.8-132.5	630.1-750	111.3-132.5
	1000mm	922.6-1000	163-176.6	880.1-1000	155.5-176.6
25mm	125mm	53.98-125	26.48-61.33	11.48-125	5.632-61.33
	250mm	179-250	87.81-122.7	136.5-250	66.96-122.7
	500mm	429-500	210.5-245.3	386.5-500	189.6-245.3
	750mm	679-750	331.1-368	636.5-750	312.3-368
	1000mm	929-1000	455.8-490.6	886.5-1000	434.9-490.6
35mm	125mm	55.05-125	52.94-120.2	12.58-125	12.095-120.2
	250mm	180.1-250	173.1-240.4	137.6-250	132.3-240.4
	500mm	430.1-500	413.5-480.8	387.6-500	372.7-480.8
	750mm	680.1-750	654-721.2	637.6-750	613.1-721.2
	1000mm	930.1-1000	894.4-961.6	887.6-1000	853.5-961.6
50mm	125mm	52.56-125	103.1-245.3	10.06-125	19.74-245.3
	250mm	177.6-250	348.5-490.6	135.1-250	265.1-490.6
	500mm	427.6-500	839.1-981.3	385.1-500	755.7-981.3
	750mm	677.6-750	1330-1472	635.1-750	1246-1472
	1000mm	927.6-1000	1820-1963	885.1-1000	1737-1963

Column ID (mm)	Bed Length (mm)	Short/Short (SS) Piston Bed Length min-max (mm)	Short/Short (SS) Piston Volume min-max (ml)	Long/Short (LS) Piston Bed Length min-max (mm)	Long/Short (LS) Piston Volume min-max (ml)	Long/Long (LL) Piston Bed Length min-max (mm)	Long/Long (LL) Piston Volume min-max (ml)
10mm	125mm	0-125	0-9.813	0-125	0-9.813	0-125	0-9.813
	250mm	125.9-250	9.881-19.63	83.38-250	6.545-19.63	40.88-250	3.209-19.63
	500mm	375.9-500	29.51-39.25	333.4-500	26.17-39.25	290.9-500	22.83-39.25
	750mm	625.9-750	49.13-58.88	583.4-750	45.8-58.88	540.9-750	42.46-58.88
	1000mm	875.9-1000	68.76-78.5	833.4-1000	65.42-78.5	790.9-1000	62.08-78.5
15mm	125mm	0-125	0-22.08	0-125	0-22.08	0-125	0-22.08
	250mm	95.26-250	16.83-44.16	52.76-250	9.319-44.16	10.26-250	1.812-44.16
	500mm	345.3-500	60.98-88.31	302.8-500	53.47-88.31	260.3-500	45.97-88.31
	750mm	595.3-750	105.1-132.5	552.8-750	97.63-132.5	510.3-750	90.12-132.5
	1000mm	845.3-1000	149.3-176.6	802.8-1000	141.8-176.6	760.3-1000	134.3-176.6
25mm	125mm	0-125	0-61.33	0-125	0-61.33	0-125	0-61.33
	250mm	108-250	52.97-122.7	65.46-250	32.121-122.7	22.96-250	11.26-122.7
	500mm	358-500	175.6-245.3	315.5-500	154.8-245.3	273-500	133.9-245.3
	750mm	608-750	298.3-368	565.5-750	277.4-368	523-750	256.6-368
	1000mm	858-1000	420.9-490.6	815.5-1000	400.1-490.6	772-1000	379.2-490.6
35mm	125mm	0-125	0-120.2	0-125	0-120.2	0-125	0-120.2
	250mm	110.1-250	105.9-240.4	57.6-250	55.39-240.4	25.1-250	24.14-240.4
	500mm	360.1-500	346.3-480.8	307.6-500	295.8-480.8	275.1-500	264.5-480.8
	750mm	610.1-750	586.7-721.2	557.6-750	536.2-721.2	525.1-750	504.9-721.2
	1000mm	860.1-1000	827.1-961.6	807.6-1000	776.6-961.6	775.1-1000	745.4-961.6
50mm	125mm	0-125	0-245.3	0-125	0-245.3	0-125	0-245.3
	250mm	105.1-250	206.3-490.6	62.62-250	122.9-490.6	20.12-250	39.49-490.6
	500mm	355.1-500	696.9-981.3	312.6-500	613.7-981.3	270.1-500	530.1-981.3
	750mm	605.1-750	1246-1472	562.6-750	1104-1472	520.1-750	1021-1472
	1000mm	855.1-1000	1678-1963	812.6-1000	1595-1963	770.1-1000	1511-1963

## Pressure and Material Specifications

Maximum Operating Pressure

Diameter (ID)	Pressure (BAR)	Pressure (PSIG)
10mm	40 BAR	580 PSIG
15mm	35 BAR	508 PSIG
25mm	24 BAR	348 PSIG
35mm	18 BAR	261 PSIG
50mm	13 BAR	188 PSIG



### Aqueous Buffer (AB) - version

Temperature Range	4-40 °C
Plunger	Acetal
Sealing	O-ring, EPDM (ethylene propylene diene monomer rubber)
Frit	Polyethylene (PE)
Height Adjustment	Short, Short/Long, Long, Fixed/Short, and Fixed/Long plungers (see table)
Connections	1/4"-28G female screw thread

### Solvent Resistant (SR) - version

Temperature Range	4-40 °C
Plunger	PEEK (polyether ether ketone)
Sealing	O-ring, Viton or Kalrez®
Frit	Teflon (TF)
Height Adjustment	Short, Short/Long, Long, Fixed/Short, and Fixed/Long plungers (see table)
Connections	1/4"-28G female screw thread


# SNAP® Series Glass Columns Part Numbering System

## S-10/250-PPSS-OE-FP10

This is an example of a typical part number description based on the following specifications:

Snap Column, 10mm ID, 250mm Max Bed Length, Peek Piston, Short/Short Piston Combination, EPDM "O" Ring, Polyethylene Frit, 10 µm Frit Porosity

### S - 10 / 250 - PPSS - OE - FP 10

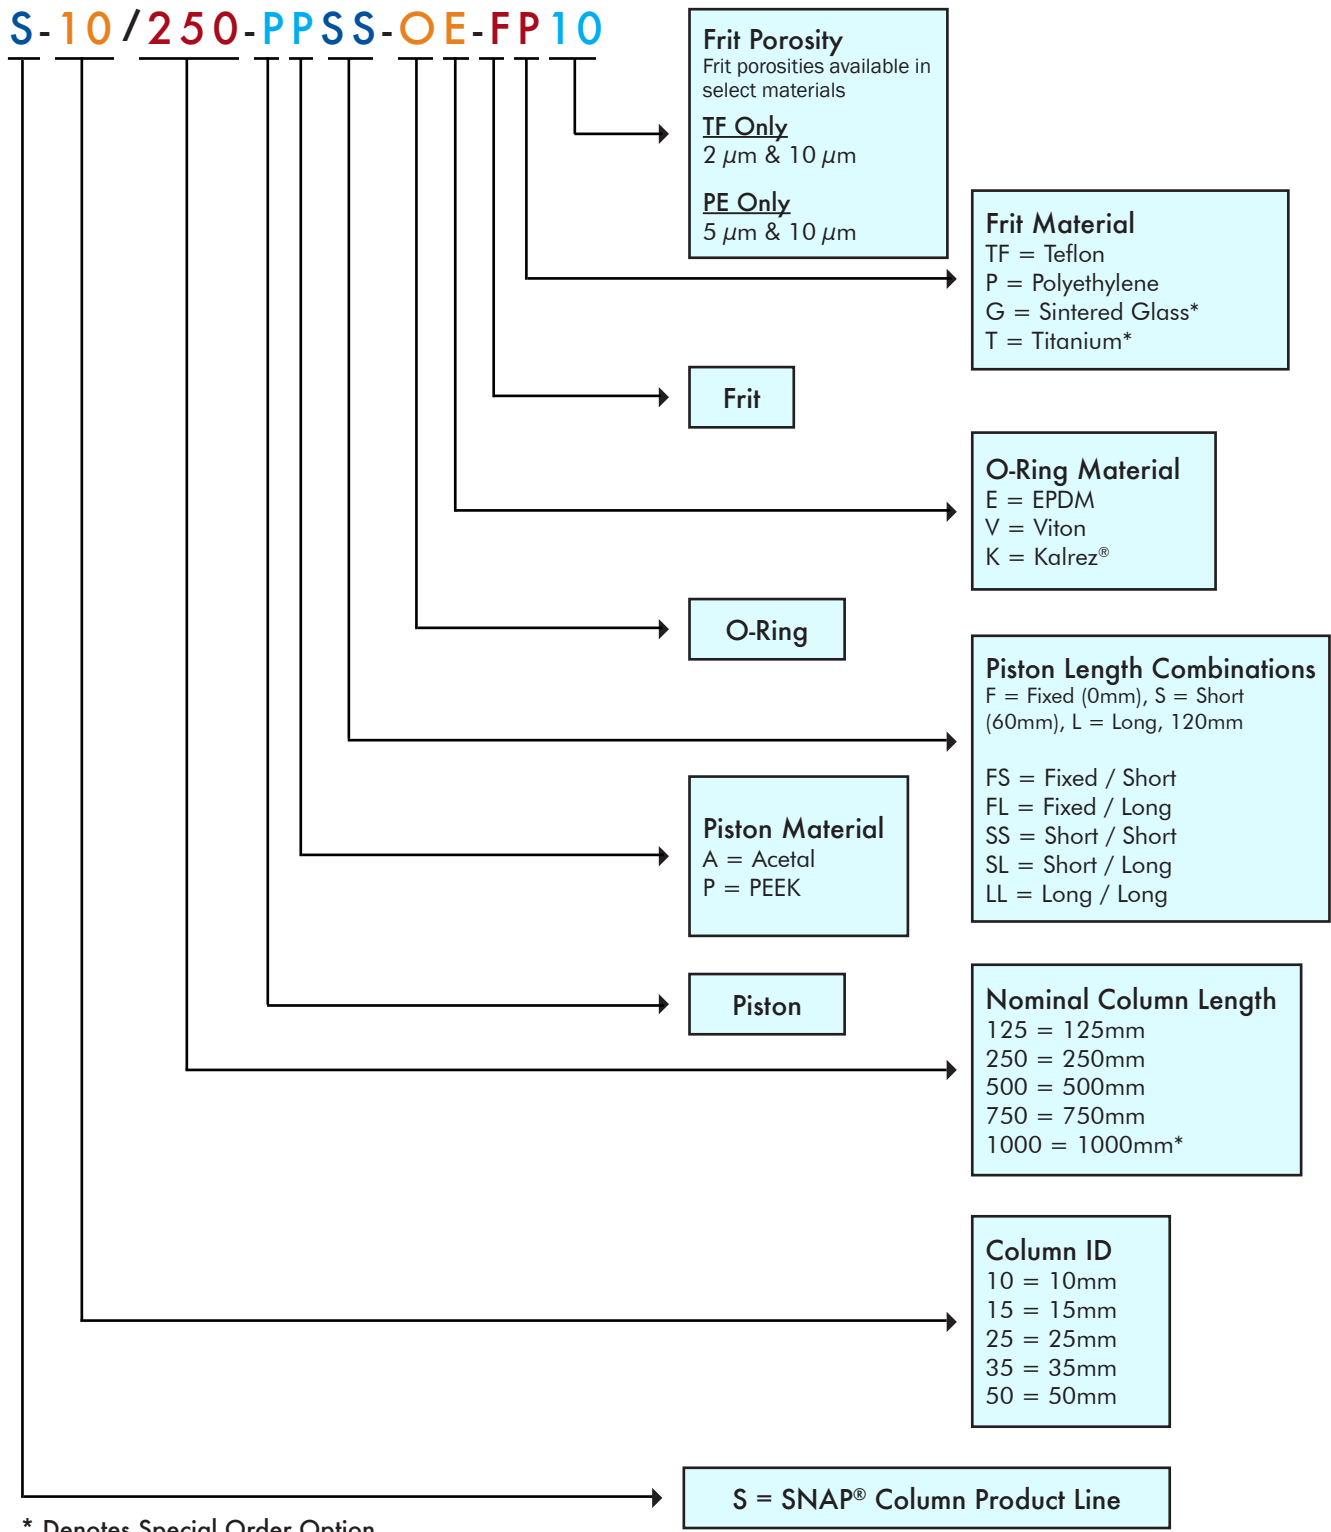


\* Denotes Special Order Option

# SNAP® Series Glass Columns, AB-Version, Fixed/Short Plungers

Length may vary slightly based on glass tolerance.

Temperature range 4 - 40 °C  
 Plunger A (Acetal)  
 Sealing O-ring, EPDM  
 Frit ID 10 - 50 mm: Polyethylene (5 µm or 10 µm)  
 Piston Configuration Fixed / Short plungers




	Part No.	ID [mm]	Pressure limit [bar]	Bed length [mm]	Volume [ml]	Frit material	Frit porosity [µm]
10 mm ID	S-10/125-PAFS-OE-FP5	10	40	62.94 - 125	4.941 - 9.813	Polyethylene	5
	S-10/250-PAFS-OE-FP5	10	40	187.9 - 250	14.75 - 19.63	Polyethylene	5
	S-10/500-PAFS-OE-FP5	10	40	437.9 - 500	34.38 - 39.25	Polyethylene	5
	S-10/750-PAFS-OE-FP5	10	40	687.9 - 750	54 - 58.88	Polyethylene	5
	S-10/1000-PAFS-OE-FP5	10	40	937.9 - 1000	73.63 - 78.5	Polyethylene	5
	S-10/125-PAFS-OE-FP10	10	40	62.94 - 125	4.941 - 9.813	Polyethylene	10
	S-10/250-PAFS-OE-FP10	10	40	187.9 - 250	14.75 - 19.63	Polyethylene	10
	S-10/500-PAFS-OE-FP10	10	40	437.9 - 500	34.38 - 39.25	Polyethylene	10
	S-10/750-PAFS-OE-FP10	10	40	687.9 - 750	54 - 58.88	Polyethylene	10
	S-10/1000-PAFS-OE-FP10	10	40	937.9 - 1000	73.63 - 78.5	Polyethylene	10
15 mm ID	S-15/125-PAFS-OE-FP5	15	35	47.63 - 125	8.413 - 22.08	Polyethylene	5
	S-15/250-PAFS-OE-FP5	15	35	172.6 - 250	30.49 - 44.16	Polyethylene	5
	S-15/500-PAFS-OE-FP5	15	35	422.6 - 500	74.65 - 88.31	Polyethylene	5
	S-15/750-PAFS-OE-FP5	15	35	672.6 - 750	118.8 - 132.5	Polyethylene	5
	S-15/1000-PAFS-OE-FP5	15	35	922.6 - 1000	163 - 176.6	Polyethylene	5
	S-15/125-PAFS-OE-FP10	15	35	47.63 - 125	8.413 - 22.08	Polyethylene	10
	S-15/250-PAFS-OE-FP10	15	35	172.6 - 250	30.49 - 44.16	Polyethylene	10
	S-15/500-PAFS-OE-FP10	15	35	422.6 - 500	74.65 - 88.31	Polyethylene	10
	S-15/750-PAFS-OE-FP10	15	35	672.6 - 750	118.8 - 132.5	Polyethylene	10
	S-15/1000-PAFS-OE-FP10	15	35	922.6 - 1000	163 - 176.6	Polyethylene	10
25 mm ID	S-25/125-PAFS-OE-FP5	25	24	53.98 - 125	26.48 - 61.33	Polyethylene	5
	S-25/250-PAFS-OE-FP5	25	24	179 - 250	87.81 - 122.7	Polyethylene	5
	S-25/500-PAFS-OE-FP5	25	24	429 - 500	210.5 - 245.3	Polyethylene	5
	S-25/750-PAFS-OE-FP5	25	24	679 - 750	331.1 - 368	Polyethylene	5
	S-25/1000-PAFS-OE-FP5	25	24	929 - 1000	455.8 - 490.6	Polyethylene	5
	S-25/125-PAFS-OE-FP10	25	24	53.98 - 125	26.48 - 61.33	Polyethylene	10
	S-25/250-PAFS-OE-FP10	25	24	179 - 250	87.81 - 122.7	Polyethylene	10
	S-25/500-PAFS-OE-FP10	25	24	429 - 500	210.5 - 245.3	Polyethylene	10
	S-25/750-PAFS-OE-FP10	25	24	679 - 750	331.1 - 368	Polyethylene	10
	S-25/1000-PAFS-OE-FP10	25	24	929 - 1000	455.8 - 490.6	Polyethylene	10
35 mm ID	S-35/125-PAFS-OE-FP5	35	18	55.05 - 125	52.94 - 120.2	Polyethylene	5
	S-35/250-PAFS-OE-FP5	35	18	180.1 - 250	173.1 - 240.4	Polyethylene	5
	S-35/500-PAFS-OE-FP5	35	18	430.1 - 500	413.5 - 480.8	Polyethylene	5
	S-35/750-PAFS-OE-FP5	35	18	680.1 - 750	654 - 721.2	Polyethylene	5
	S-35/1000-PAFS-OE-FP5	35	18	930.1 - 1000	894.4 - 961.6	Polyethylene	5
	S-35/125-PAFS-OE-FP10	35	18	55.05 - 125	52.94 - 120.2	Polyethylene	10
	S-35/250-PAFS-OE-FP10	35	18	180.1 - 250	173.1 - 240.4	Polyethylene	10
	S-35/500-PAFS-OE-FP10	35	18	430.1 - 500	413.5 - 480.8	Polyethylene	10
	S-35/750-PAFS-OE-FP10	35	18	680.1 - 750	654 - 721.2	Polyethylene	10
	S-35/1000-PAFS-OE-FP10	35	18	930.1 - 1000	894.4 - 961.6	Polyethylene	10
50 mm ID	S-50/125-PAFS-OE-FP5	50	13	52.56 - 125	103.1 - 245.3	Polyethylene	5
	S-50/250-PAFS-OE-FP5	50	13	177.6 - 250	348.5 - 490.6	Polyethylene	5
	S-50/500-PAFS-OE-FP5	50	13	427.6 - 500	839.1 - 981.3	Polyethylene	5
	S-50/750-PAFS-OE-FP5	50	13	677.6 - 750	1330 - 1472	Polyethylene	5
	S-50/1000-PAFS-OE-FP5	50	13	927.6 - 1000	1820 - 1963	Polyethylene	5
	S-50/125-PAFS-OE-FP10	50	13	52.56 - 125	103.1 - 245.3	Polyethylene	10
	S-50/250-PAFS-OE-FP10	50	13	177.6 - 250	348.5 - 490.6	Polyethylene	10
	S-50/500-PAFS-OE-FP10	50	13	427.6 - 500	839.1 - 981.3	Polyethylene	10
	S-50/750-PAFS-OE-FP10	50	13	677.6 - 750	1330 - 1472	Polyethylene	10
	S-50/1000-PAFS-OE-FP10	50	13	927.6 - 1000	1820 - 1963	Polyethylene	10



# SNAP® Series Glass Columns, AB-Version, Fixed/Long Plungers

Length may vary slightly based on glass tolerance.

Temperature range 4 - 40 °C  
 Plunger A (Acetal)  
 Sealing O-ring, EPDM  
 Frit ID 10 - 50 mm: Polyethylene (5 µm or 10 µm)  
 Piston Configuration Fixed / Long plungers




	Part No.	ID [mm]	Pressure limit [bar]	Bed length [mm]	Volume [ml]	Frit material	Frit porosity [µm]
10 mm ID	S-10/125-PAFL-OE-FP5	10	40	20.44 - 125	1.604 - 9.813	Polyethylene	5
	S-10/250-PAFL-OE-FP5	10	40	145.4 - 250	11.42 - 19.63	Polyethylene	5
	S-10/500-PAFL-OE-FP5	10	40	395.4 - 500	31.04 - 39.25	Polyethylene	5
	S-10/750-PAFL-OE-FP5	10	40	645.4 - 750	50.67 - 58.88	Polyethylene	5
	S-10/1000-PAFL-OE-FP5	10	40	895.3 - 1000	70.28 - 78.5	Polyethylene	5
	S-10/125-PAFL-OE-FP10	10	40	20.44 - 125	1.604 - 9.813	Polyethylene	10
	S-10/250-PAFL-OE-FP10	10	40	145.4 - 250	11.42 - 19.63	Polyethylene	10
	S-10/500-PAFL-OE-FP10	10	40	395.4 - 500	31.04 - 39.25	Polyethylene	10
	S-10/750-PAFL-OE-FP10	10	40	645.4 - 750	50.67 - 58.88	Polyethylene	10
	S-10/1000-PAFL-OE-FP10	10	40	895.3 - 1000	70.28 - 78.5	Polyethylene	10
15 mm ID	S-15/125-PAFL-OE-FP5	15	35	5.13 - 125	0.906 - 22.08	Polyethylene	5
	S-15/250-PAFL-OE-FP5	15	35	130.1 - 250	22.98 - 44.16	Polyethylene	5
	S-15/500-PAFL-OE-FP5	15	35	380.1 - 500	67.14 - 88.31	Polyethylene	5
	S-15/750-PAFL-OE-FP5	15	35	630.1 - 750	111.3 - 132.5	Polyethylene	5
	S-15/1000-PAFL-OE-FP5	15	35	880.1 - 1000	155.5 - 176.6	Polyethylene	5
	S-15/125-PAFL-OE-FP10	15	35	5.13 - 125	0.906 - 22.08	Polyethylene	10
	S-15/250-PAFL-OE-FP10	15	35	130.1 - 250	22.98 - 44.16	Polyethylene	10
	S-15/500-PAFL-OE-FP10	15	35	380.1 - 500	67.14 - 88.31	Polyethylene	10
	S-15/750-PAFL-OE-FP10	15	35	630.1 - 750	111.3 - 132.5	Polyethylene	10
	S-15/1000-PAFL-OE-FP10	15	35	880.1 - 1000	155.5 - 176.6	Polyethylene	10
25 mm ID	S-25/125-PAFL-OE-FP5	25	24	11.48 - 125	5.632 - 61.33	Polyethylene	5
	S-25/250-PAFL-OE-FP5	25	24	136.5 - 250	66.96 - 122.7	Polyethylene	5
	S-25/500-PAFL-OE-FP5	25	24	386.5 - 500	189.6 - 245.3	Polyethylene	5
	S-25/750-PAFL-OE-FP5	25	24	636.5 - 750	312.3 - 368	Polyethylene	5
	S-25/1000-PAFL-OE-FP5	25	24	886.5 - 1000	434.9 - 490.6	Polyethylene	5
	S-25/125-PAFL-OE-FP10	25	24	11.48 - 125	5.632 - 61.33	Polyethylene	10
	S-25/250-PAFL-OE-FP10	25	24	136.5 - 250	66.96 - 122.7	Polyethylene	10
	S-25/500-PAFL-OE-FP10	25	24	386.5 - 500	189.6 - 245.3	Polyethylene	10
	S-25/750-PAFL-OE-FP10	25	24	636.5 - 750	312.3 - 368	Polyethylene	10
	S-25/1000-PAFL-OE-FP10	25	24	886.5 - 1000	434.9 - 490.6	Polyethylene	10
35 mm ID	S-35/125-PAFL-OE-FP5	35	18	12.58 - 125	12.095 - 120.2	Polyethylene	5
	S-35/250-PAFL-OE-FP5	35	18	137.6 - 250	132.3 - 240.4	Polyethylene	5
	S-35/500-PAFL-OE-FP5	35	18	387.6 - 500	372.7 - 480.8	Polyethylene	5
	S-35/750-PAFL-OE-FP5	35	18	637.6 - 750	613.1 - 721.2	Polyethylene	5
	S-35/1000-PAFL-OE-FP5	35	18	887.6 - 1000	853.5 - 961.6	Polyethylene	5
	S-35/125-PAFL-OE-FP10	35	18	12.58 - 125	12.095 - 120.2	Polyethylene	10
	S-35/250-PAFL-OE-FP10	35	18	137.6 - 250	132.3 - 240.4	Polyethylene	10
	S-35/500-PAFL-OE-FP10	35	18	387.6 - 500	372.7 - 480.8	Polyethylene	10
	S-35/750-PAFL-OE-FP10	35	18	637.6 - 750	613.1 - 721.2	Polyethylene	10
	S-35/1000-PAFL-OE-FP10	35	18	887.6 - 1000	853.5 - 961.6	Polyethylene	10
50 mm ID	S-50/125-PAFL-OE-FP5	50	13	10.06 - 125	19.74 - 245.3	Polyethylene	5
	S-50/250-PAFL-OE-FP5	50	13	135.1 - 250	265.1 - 490.6	Polyethylene	5
	S-50/500-PAFL-OE-FP5	50	13	385.1 - 500	755.7 - 981.3	Polyethylene	5
	S-50/750-PAFL-OE-FP5	50	13	635.1 - 750	1246 - 1472	Polyethylene	5
	S-50/1000-PAFL-OE-FP5	50	13	885.1 - 1000	1737 - 1963	Polyethylene	5
	S-50/125-PAFL-OE-FP10	50	13	10.06 - 125	19.74 - 245.3	Polyethylene	10
	S-50/250-PAFL-OE-FP10	50	13	135.1 - 250	265.1 - 490.6	Polyethylene	10
	S-50/500-PAFL-OE-FP10	50	13	385.1 - 500	755.7 - 981.3	Polyethylene	10
	S-50/750-PAFL-OE-FP10	50	13	635.1 - 750	1246 - 1472	Polyethylene	10
	S-50/1000-PAFL-OE-FP10	50	13	885.1 - 1000	1737 - 1963	Polyethylene	10

# SNAP® Series Glass Columns, AB-Version, Short/Short Plungers

Length may vary slightly based on glass tolerance.

Temperature range 4 - 40 °C  
 Plunger A (Acetal)  
 Sealing O-ring, EPDM  
 Frit ID 10 - 50 mm: Polyethylene (5 µm or 10 µm)  
 Piston Configuration Short plungers




	Part No.	ID [mm]	Pressure limit [bar]	Bed length [mm]	Volume [ml]	Frit material	Frit porosity [µm]
10 mm ID	S-10/125-PASS-OE-FP5	10	40	0 - 125	0 - 9.813	Polyethylene	5
	S-10/250-PASS-OE-FP5	10	40	125.9 - 250	9.881 - 19.63	Polyethylene	5
	S-10/500-PASS-OE-FP5	10	40	375.9 - 500	29.51 - 39.25	Polyethylene	5
	S-10/750-PASS-OE-FP5	10	40	625.9 - 750	49.13 - 58.88	Polyethylene	5
	S-10/1000-PASS-OE-FP5	10	40	875.9 - 1000	68.76 - 78.5	Polyethylene	5
	S-10/125-PASS-OE-FP10	10	40	0 - 125	0 - 9.813	Polyethylene	10
	S-10/250-PASS-OE-FP10	10	40	125.9 - 250	9.881 - 19.63	Polyethylene	10
	S-10/500-PASS-OE-FP10	10	40	375.9 - 500	29.51 - 39.25	Polyethylene	10
	S-10/750-PASS-OE-FP10	10	40	625.9 - 750	49.13 - 58.88	Polyethylene	10
	S-10/1000-PASS-OE-FP10	10	40	875.9 - 1000	68.76 - 78.5	Polyethylene	10
15 mm ID	S-15/125-PASS-OE-FP5	15	35	0 - 125	0 - 22.08	Polyethylene	5
	S-15/250-PASS-OE-FP5	15	35	95.26 - 250	16.83 - 44.16	Polyethylene	5
	S-15/500-PASS-OE-FP5	15	35	345.3 - 500	60.98 - 88.31	Polyethylene	5
	S-15/750-PASS-OE-FP5	15	35	595.3 - 750	105.1 - 132.5	Polyethylene	5
	S-15/1000-PASS-OE-FP5	15	35	845.3 - 1000	149.3 - 176.6	Polyethylene	5
	S-15/125-PASS-OE-FP10	15	35	0 - 125	0 - 22.08	Polyethylene	10
	S-15/250-PASS-OE-FP10	15	35	95.26 - 250	16.83 - 44.16	Polyethylene	10
	S-15/500-PASS-OE-FP10	15	35	345.3 - 500	60.98 - 88.31	Polyethylene	10
	S-15/750-PASS-OE-FP10	15	35	595.3 - 750	105.1 - 132.5	Polyethylene	10
	S-15/1000-PASS-OE-FP10	15	35	845.3 - 1000	149.3 - 176.6	Polyethylene	10
25 mm ID	S-25/125-PASS-OE-FP5	25	24	0 - 125	0 - 61.33	Polyethylene	5
	S-25/250-PASS-OE-FP5	25	24	108 - 250	52.97 - 122.7	Polyethylene	5
	S-25/500-PASS-OE-FP5	25	24	358 - 500	175.6 - 245.3	Polyethylene	5
	S-25/750-PASS-OE-FP5	25	24	608 - 750	298.3 - 368	Polyethylene	5
	S-25/1000-PASS-OE-FP5	25	24	858 - 1000	420.9 - 490.6	Polyethylene	5
	S-25/125-PASS-OE-FP10	25	24	0 - 125	0 - 61.33	Polyethylene	10
	S-25/250-PASS-OE-FP10	25	24	108 - 250	52.97 - 122.7	Polyethylene	10
	S-25/500-PASS-OE-FP10	25	24	358 - 500	175.6 - 245.3	Polyethylene	10
	S-25/750-PASS-OE-FP10	25	24	608 - 750	298.3 - 368	Polyethylene	10
	S-25/1000-PASS-OE-FP10	25	24	858 - 1000	420.9 - 490.6	Polyethylene	10
35 mm ID	S-35/125-PASS-OE-FP5	35	18	0 - 125	0 - 120.2	Polyethylene	5
	S-35/250-PASS-OE-FP5	35	18	110.1 - 250	105.9 - 240.4	Polyethylene	5
	S-35/500-PASS-OE-FP5	35	18	360.1 - 500	346.3 - 480.8	Polyethylene	5
	S-35/750-PASS-OE-FP5	35	18	610.1 - 750	586.7 - 721.2	Polyethylene	5
	S-35/1000-PASS-OE-FP5	35	18	860.1 - 1000	827.1 - 961.6	Polyethylene	5
	S-35/125-PASS-OE-FP10	35	18	0 - 125	0 - 120.2	Polyethylene	10
	S-35/250-PASS-OE-FP10	35	18	110.1 - 250	105.9 - 240.4	Polyethylene	10
	S-35/500-PASS-OE-FP10	35	18	360.1 - 500	346.3 - 480.8	Polyethylene	10
	S-35/750-PASS-OE-FP10	35	18	610.1 - 750	586.7 - 721.2	Polyethylene	10
	S-35/1000-PASS-OE-FP10	35	18	860.1 - 1000	827.1 - 961.6	Polyethylene	10
50 mm ID	S-50/125-PASS-OE-FP5	50	13	0 - 125	0 - 245.3	Polyethylene	5
	S-50/250-PASS-OE-FP5	50	13	105.1 - 250	206.3 - 490.6	Polyethylene	5
	S-50/500-PASS-OE-FP5	50	13	355.1 - 500	696.9 - 981.3	Polyethylene	5
	S-50/750-PASS-OE-FP5	50	13	605.1 - 750	1246 - 1472	Polyethylene	5
	S-50/1000-PASS-OE-FP5	50	13	855.1 - 1000	1678 - 1963	Polyethylene	5
	S-50/125-PASS-OE-FP10	50	13	0 - 125	0 - 245.3	Polyethylene	10
	S-50/250-PASS-OE-FP10	50	13	105.1 - 250	206.3 - 490.6	Polyethylene	10
	S-50/500-PASS-OE-FP10	50	13	355.1 - 500	696.9 - 981.3	Polyethylene	10
	S-50/750-PASS-OE-FP10	50	13	605.1 - 750	1246 - 1472	Polyethylene	10
	S-50/1000-PASS-OE-FP10	50	13	855.1 - 1000	1678 - 1963	Polyethylene	10

# SNAP® Series Glass Columns, AB-Version, Short/Long Plungers

Length may vary slightly based on glass tolerance.

Temperature range 4 - 40 °C  
 Plunger A (Acetal)  
 Sealing O-ring, EPDM  
 Frit ID 10 - 50 mm: Polyethylene (5 µm or 10 µm)  
 Piston Configuration Short / Long plungers




	Part No.	ID [mm]	Pressure limit [bar]	Bed length [mm]	Volume [ml]	Frit material	Frit porosity [µm]
10 mm ID	S-10/125-PASL-OE-FP5	10	40	0 - 125	0 - 9.813	Polyethylene	5
	S-10/250-PASL-OE-FP5	10	40	83.38 - 250	6.545 - 19.63	Polyethylene	5
	S-10/500-PASL-OE-FP5	10	40	333.4 - 500	26.17 - 39.25	Polyethylene	5
	S-10/750-PASL-OE-FP5	10	40	583.4 - 750	45.8 - 58.88	Polyethylene	5
	S-10/1000-PASL-OE-FP5	10	40	833.4 - 1000	65.42 - 78.5	Polyethylene	5
	S-10/125-PASL-OE-FP10	10	40	0 - 125	0 - 9.813	Polyethylene	10
	S-10/250-PASL-OE-FP10	10	40	83.38 - 250	6.545 - 19.63	Polyethylene	10
	S-10/500-PASL-OE-FP10	10	40	333.4 - 500	26.17 - 39.25	Polyethylene	10
	S-10/750-PASL-OE-FP10	10	40	583.4 - 750	45.8 - 58.88	Polyethylene	10
	S-10/1000-PASL-OE-FP10	10	40	833.4 - 1000	65.42 - 78.5	Polyethylene	10
15 mm ID	S-15/125-PASL-OE-FP5	15	35	0 - 125	0 - 22.08	Polyethylene	5
	S-15/250-PASL-OE-FP5	15	35	52.76 - 250	9.319 - 44.16	Polyethylene	5
	S-15/500-PASL-OE-FP5	15	35	302.8 - 500	53.47 - 88.31	Polyethylene	5
	S-15/750-PASL-OE-FP5	15	35	552.8 - 750	97.63 - 132.5	Polyethylene	5
	S-15/1000-PASL-OE-FP5	15	35	802.8 - 1000	141.8 - 176.6	Polyethylene	5
	S-15/125-PASL-OE-FP10	15	35	0 - 125	0 - 22.08	Polyethylene	10
	S-15/250-PASL-OE-FP10	15	35	52.76 - 250	9.319 - 44.16	Polyethylene	10
	S-15/500-PASL-OE-FP10	15	35	302.8 - 500	53.47 - 88.31	Polyethylene	10
	S-15/750-PASL-OE-FP10	15	35	552.8 - 750	97.63 - 132.5	Polyethylene	10
	S-15/1000-PASL-OE-FP10	15	35	802.8 - 1000	141.8 - 176.6	Polyethylene	10
25 mm ID	S-25/125-PASL-OE-FP5	25	24	0 - 125	0 - 61.33	Polyethylene	5
	S-25/250-PASL-OE-FP5	25	24	65.46 - 250	32.121 - 122.7	Polyethylene	5
	S-25/500-PASL-OE-FP5	25	24	315.5 - 500	154.8 - 245.3	Polyethylene	5
	S-25/750-PASL-OE-FP5	25	24	565.5 - 750	277.4 - 368	Polyethylene	5
	S-25/1000-PASL-OE-FP5	25	24	815.5 - 1000	400.1 - 490.6	Polyethylene	5
	S-25/125-PASL-OE-FP10	25	24	0 - 125	0 - 61.33	Polyethylene	10
	S-25/250-PASL-OE-FP10	25	24	65.46 - 250	32.121 - 122.7	Polyethylene	10
	S-25/500-PASL-OE-FP10	25	24	315.5 - 500	154.8 - 245.3	Polyethylene	10
	S-25/750-PASL-OE-FP10	25	24	565.5 - 750	277.4 - 368	Polyethylene	10
	S-25/1000-PASL-OE-FP10	25	24	815.5 - 1000	400.1 - 490.6	Polyethylene	10
35 mm ID	S-35/125-PASL-OE-FP5	35	18	0 - 125	0 - 120.2	Polyethylene	5
	S-35/250-PASL-OE-FP5	35	18	57.6 - 250	55.39 - 240.4	Polyethylene	5
	S-35/500-PASL-OE-FP5	35	18	307.6 - 500	295.8 - 480.8	Polyethylene	5
	S-35/750-PASL-OE-FP5	35	18	557.6 - 750	536.2 - 721.2	Polyethylene	5
	S-35/1000-PASL-OE-FP5	35	18	807.6 - 1000	776.6 - 961.6	Polyethylene	5
	S-35/125-PASL-OE-FP10	35	18	0 - 125	0 - 120.2	Polyethylene	10
	S-35/250-PASL-OE-FP10	35	18	57.6 - 250	55.39 - 240.4	Polyethylene	10
	S-35/500-PASL-OE-FP10	35	18	307.6 - 500	295.8 - 480.8	Polyethylene	10
	S-35/750-PASL-OE-FP10	35	18	557.6 - 750	536.2 - 721.2	Polyethylene	10
	S-35/1000-PASL-OE-FP10	35	18	807.6 - 1000	776.6 - 961.6	Polyethylene	10
50 mm ID	S-50/125-PASL-OE-FP5	50	13	0 - 125	0 - 245.3	Polyethylene	5
	S-50/250-PASL-OE-FP5	50	13	62.62 - 250	122.9 - 490.6	Polyethylene	5
	S-50/500-PASL-OE-FP5	50	13	312.6 - 500	613.7 - 981.3	Polyethylene	5
	S-50/750-PASL-OE-FP5	50	13	562.6 - 750	1104 - 1472	Polyethylene	5
	S-50/1000-PASL-OE-FP5	50	13	812.6 - 1000	1595 - 1963	Polyethylene	5
	S-50/125-PASL-OE-FP10	50	13	0 - 125	0 - 245.3	Polyethylene	10
	S-50/250-PASL-OE-FP10	50	13	62.62 - 250	122.9 - 490.6	Polyethylene	10
	S-50/500-PASL-OE-FP10	50	13	312.6 - 500	613.7 - 981.3	Polyethylene	10
	S-50/750-PASL-OE-FP10	50	13	562.6 - 750	1104 - 1472	Polyethylene	10
	S-50/1000-PASL-OE-FP10	50	13	812.6 - 1000	1595 - 1963	Polyethylene	10

# SNAP® Series Glass Columns, AB-Version, Long/Long Plungers

Length may vary slightly based on glass tolerance.

Temperature range 4 - 40 °C  
 Plunger A (Acetal)  
 Sealing O-ring, EPDM  
 Frit ID 10 - 50 mm: Polyethylene (5 µm or 10 µm)  
 Piston Configuration Long plungers




	Part No.	ID [mm]	Pressure limit [bar]	Bed length [mm]	Volume [ml]	Frit material	Frit porosity [µm]
10 mm ID	S-10/125-PALL-OE-FP5	10	40	0 - 125	0 - 9.813	Polyethylene	5
	S-10/250-PALL-OE-FP5	10	40	40.88 - 250	3.209 - 19.63	Polyethylene	5
	S-10/500-PALL-OE-FP5	10	40	290.9 - 500	222.83 - 39.25	Polyethylene	5
	S-10/750-PALL-OE-FP5	10	40	540.9 - 750	42.46 - 58.88	Polyethylene	5
	S-10/1000-PALL-OE-FP5	10	40	790.9 - 1000	62.08 - 78.5	Polyethylene	5
	S-10/125-PALL-OE-FP10	10	40	0 - 125	0 - 9.813	Polyethylene	10
15 mm ID	S-10/250-PALL-OE-FP10	10	40	40.88 - 250	3.209 - 19.63	Polyethylene	10
	S-10/500-PALL-OE-FP10	10	40	290.9 - 500	222.83 - 39.25	Polyethylene	10
	S-10/750-PALL-OE-FP10	10	40	540.9 - 750	42.46 - 58.88	Polyethylene	10
	S-10/1000-PALL-OE-FP10	10	40	790.9 - 1000	62.08 - 78.5	Polyethylene	10
	S-15/125-PALL-OE-FP5	15	35	0 - 125	0 - 22.08	Polyethylene	5
	S-15/250-PALL-OE-FP5	15	35	10.26 - 250	1.812 - 44.16	Polyethylene	5
25 mm ID	S-15/500-PALL-OE-FP5	15	35	260.3 - 500	45.97 - 88.31	Polyethylene	5
	S-15/750-PALL-OE-FP5	15	35	510.3 - 750	90.12 - 132.5	Polyethylene	5
	S-15/1000-PALL-OE-FP5	15	35	760.3 - 1000	134.3 - 176.6	Polyethylene	5
	S-15/125-PALL-OE-FP10	15	35	0 - 125	0 - 22.08	Polyethylene	10
	S-15/250-PALL-OE-FP10	15	35	10.26 - 250	1.812 - 44.16	Polyethylene	10
	S-15/500-PALL-OE-FP10	15	35	260.3 - 500	45.97 - 88.31	Polyethylene	10
35 mm ID	S-15/750-PALL-OE-FP10	15	35	510.3 - 750	90.12 - 132.5	Polyethylene	10
	S-15/1000-PALL-OE-FP10	15	35	760.3 - 1000	134.3 - 176.6	Polyethylene	10
	S-25/125-PALL-OE-FP5	25	24	0 - 125	0 - 61.33	Polyethylene	5
	S-25/250-PALL-OE-FP5	25	24	22.96 - 250	11.26 - 122.7	Polyethylene	5
	S-25/500-PALL-OE-FP5	25	24	273 - 500	133.9 - 245.3	Polyethylene	5
	S-25/750-PALL-OE-FP5	25	24	523 - 750	256.6 - 368	Polyethylene	5
50 mm ID	S-25/1000-PALL-OE-FP5	25	24	773 - 1000	379.2 - 490.6	Polyethylene	5
	S-25/125-PALL-OE-FP10	25	24	0 - 125	0 - 61.33	Polyethylene	10
	S-25/250-PALL-OE-FP10	25	24	22.96 - 250	11.26 - 122.7	Polyethylene	10
	S-25/500-PALL-OE-FP10	25	24	273 - 500	133.9 - 245.3	Polyethylene	10
	S-25/750-PALL-OE-FP10	25	24	523 - 750	256.6 - 368	Polyethylene	10
	S-25/1000-PALL-OE-FP10	25	24	773 - 1000	379.2 - 490.6	Polyethylene	10
50 mm ID	S-35/125-PALL-OE-FP5	35	18	0 - 125	0 - 120.2	Polyethylene	5
	S-35/250-PALL-OE-FP5	35	18	25.1 - 250	24.14 - 240.4	Polyethylene	5
	S-35/500-PALL-OE-FP5	35	18	275.1 - 500	264.5 - 480.8	Polyethylene	5
	S-35/750-PALL-OE-FP5	35	18	307.6 - 500	295.8 - 480.8	Polyethylene	5
	S-35/1000-PALL-OE-FP5	35	18	775.1 - 1000	745.4 - 961.6	Polyethylene	5
	S-35/125-PALL-OE-FP10	35	18	0 - 125	0 - 120.2	Polyethylene	10
50 mm ID	S-35/250-PALL-OE-FP10	35	18	25.1 - 250	24.14 - 240.4	Polyethylene	10
	S-35/500-PALL-OE-FP10	35	18	307.6 - 500	295.8 - 480.8	Polyethylene	10
	S-35/750-PALL-OE-FP10	35	18	307.6 - 500	295.8 - 480.8	Polyethylene	10
	S-35/1000-PALL-OE-FP10	35	18	775.1 - 1000	745.4 - 961.6	Polyethylene	10
	S-50/125-PALL-OE-FP5	50	13	0 - 125	0 - 245.3	Polyethylene	5
	S-50/250-PALL-OE-FP5	50	13	20.12 - 250	39.49 - 490.6	Polyethylene	5
50 mm ID	S-50/500-PALL-OE-FP5	50	13	270.1 - 500	530.1 - 981.3	Polyethylene	5
	S-50/750-PALL-OE-FP5	50	13	520.1 - 750	1021 - 1472	Polyethylene	5
	S-50/1000-PALL-OE-FP5	50	13	775.1 - 1000	1511 - 1963	Polyethylene	5
	S-50/125-PALL-OE-FP10	50	13	0 - 125	0 - 245.3	Polyethylene	10
	S-50/250-PALL-OE-FP10	50	13	20.12 - 250	39.49 - 490.6	Polyethylene	10
	S-50/500-PALL-OE-FP10	50	13	270.1 - 500	530.1 - 981.3	Polyethylene	10
50 mm ID	S-50/750-PALL-OE-FP10	50	13	520.1 - 750	1021 - 1472	Polyethylene	10
	S-50/1000-PALL-OE-FP10	50	13	775.1 - 1000	1511 - 1963	Polyethylene	10

# SNAP® Series Glass Columns, SR-Version, Fixed/Short Plungers

Length may vary slightly based on glass tolerance.

Temperature range 4 - 40 °C  
 Plunger PEEK  
 Sealing Viton or Kalrez®  
 Frit ID 10 - 50 mm: Teflon (2 µm or 10 µm)  
 Piston Configuration Fixed / Short plungers




	Part No.	ID [mm]	Pressure limit [bar]	Bed length [mm]	Volume [ml]	Frit material	Frit porosity [µm]
10 mm ID	S-10/125-PPFS-OV-FT2	10	40	62.94 - 125	4.941 - 9.813	Teflon	2
	S-10/250-PPFS-OV-FT2	10	40	187.9 - 250	14.75 - 19.63	Teflon	2
	S-10/500-PPFS-OV-FT2	10	40	437.9 - 500	34.38 - 39.25	Teflon	2
	S-10/750-PPFS-OV-FT2	10	40	687.9 - 750	54 - 58.88	Teflon	2
	S-10/1000-PPFS-OV-FT2	10	40	937.9 - 1000	73.63 - 78.5	Teflon	2
	S-10/125-PPFS-OV-FT10	10	40	62.94 - 125	4.941 - 9.813	Teflon	10
	S-10/250-PPFS-OV-FT10	10	40	187.9 - 250	14.75 - 19.63	Teflon	10
	S-10/500-PPFS-OV-FT10	10	40	437.9 - 500	34.38 - 39.25	Teflon	10
	S-10/750-PPFS-OV-FT10	10	40	687.9 - 750	54 - 58.88	Teflon	10
	S-10/1000-PPFS-OV-FT10	10	40	937.9 - 1000	73.63 - 78.5	Teflon	10
15 mm ID	S-15/125-PPFS-OV-FT2	15	35	47.63 - 125	8.413 - 22.08	Teflon	2
	S-15/250-PPFS-OV-FT2	15	35	172.6 - 250	30.49 - 44.16	Teflon	2
	S-15/500-PPFS-OV-FT2	15	35	422.6 - 500	74.65 - 88.31	Teflon	2
	S-15/750-PPFS-OV-FT2	15	35	672.6 - 750	118.8 - 132.5	Teflon	2
	S-15/1000-PPFS-OV-FT2	15	35	922.6 - 1000	163 - 176.6	Teflon	2
	S-15/125-PPFS-OV-FT10	15	35	47.63 - 125	8.413 - 22.08	Teflon	10
	S-15/250-PPFS-OV-FT10	15	35	172.6 - 250	30.49 - 44.16	Teflon	10
	S-15/500-PPFS-OV-FT10	15	35	422.6 - 500	74.65 - 88.31	Teflon	10
	S-15/750-PPFS-OV-FT10	15	35	672.6 - 750	118.8 - 132.5	Teflon	10
	S-15/1000-PPFS-OV-FT10	15	35	922.6 - 1000	163 - 176.6	Teflon	10
25 mm ID	S-25/125-PPFS-OV-FT2	25	24	53.98 - 125	26.48 - 61.33	Teflon	2
	S-25/250-PPFS-OV-FT2	25	24	179 - 250	87.81 - 122.7	Teflon	2
	S-25/500-PPFS-OV-FT2	25	24	429 - 500	210.5 - 245.3	Teflon	2
	S-25/750-PPFS-OV-FT2	25	24	679 - 750	331.1 - 368	Teflon	2
	S-25/1000-PPFS-OV-FT2	25	24	929 - 1000	455.8 - 490.6	Teflon	2
	S-25/125-PPFS-OV-FT10	25	24	53.98 - 125	26.48 - 61.33	Teflon	10
	S-25/250-PPFS-OV-FT10	25	24	179 - 250	87.81 - 122.7	Teflon	10
	S-25/500-PPFS-OV-FT10	25	24	429 - 500	210.5 - 245.3	Teflon	10
	S-25/750-PPFS-OV-FT10	25	24	679 - 750	331.1 - 368	Teflon	10
	S-25/1000-PPFS-OV-FT10	25	24	929 - 1000	455.8 - 490.6	Teflon	10
35 mm ID	S-35/125-PPFS-OV-FT2	35	18	55.05 - 125	52.94 - 120.2	Teflon	2
	S-35/250-PPFS-OV-FT2	35	18	180.1 - 250	173.1 - 240.4	Teflon	2
	S-35/500-PPFS-OV-FT2	35	18	430.1 - 500	413.5 - 480.8	Teflon	2
	S-35/750-PPFS-OV-FT2	35	18	680.1 - 750	654 - 721.2	Teflon	2
	S-35/1000-PPFS-OV-FT2	35	18	930.1 - 1000	894.4 - 961.6	Teflon	2
	S-35/125-PPFS-OV-FT10	35	18	55.05 - 125	52.94 - 120.2	Teflon	10
	S-35/250-PPFS-OV-FT10	35	18	180.1 - 250	173.1 - 240.4	Teflon	10
	S-35/500-PPFS-OV-FT10	35	18	430.1 - 500	413.5 - 480.8	Teflon	10
	S-35/750-PPFS-OV-FT10	35	18	680.1 - 750	654 - 721.2	Teflon	10
	S-35/1000-PPFS-OV-FT10	35	18	930.1 - 1000	894.4 - 961.6	Teflon	10
50 mm ID	S-50/125-PPFS-OV-FT2	50	13	52.56 - 125	103.1 - 245.3	Teflon	2
	S-50/250-PPFS-OV-FT2	50	13	177.6 - 250	348.5 - 490.6	Teflon	2
	S-50/500-PPFS-OV-FT2	50	13	427.6 - 500	839.1 - 981.3	Teflon	2
	S-50/750-PPFS-OV-FT2	50	13	677.6 - 750	1330 - 1472	Teflon	2
	S-50/1000-PPFS-OV-FT2	50	13	927.6 - 1000	1820 - 1963	Teflon	2
	S-50/125-PPFS-OV-FT10	50	13	52.56 - 125	103.1 - 245.3	Teflon	10
	S-50/250-PPFS-OV-FT10	50	13	177.6 - 250	348.5 - 490.6	Teflon	10
	S-50/500-PPFS-OV-FT10	50	13	427.6 - 500	839.1 - 981.3	Teflon	10
	S-50/750-PPFS-OV-FT10	50	13	677.6 - 750	1330 - 1472	Teflon	10
	S-50/1000-PPFS-OV-FT10	50	13	927.6 - 1000	1820 - 1963	Teflon	10

# SNAP® Series Glass Columns, SR-Version, Fixed/Long Plungers

Length may vary slightly based on glass tolerance.

Temperature range 4 - 40 °C  
 Plunger PEEK  
 Sealing Viton or Kalrez®  
 Frit ID 10 - 50 mm: Teflon (2 µm or 10 µm)  
 Piston Configuration Fixed / Long plungers




	Part No.	ID [mm]	Pressure limit [bar]	Bed length [mm]	Volume [ml]	Frit material	Frit porosity [µm]
10 mm ID	S-10/125-PPFL-OV-FT2	10	40	20.44 - 125	1.604 - 9.813	Teflon	2
	S-10/250-PPFL-OV-FT2	10	40	145.4 - 250	11.42 - 19.63	Teflon	2
	S-10/500-PPFL-OV-FT2	10	40	395.4 - 500	31.04 - 39.25	Teflon	2
	S-10/750-PPFL-OV-FT2	10	40	645.4 - 750	50.67 - 58.88	Teflon	2
	S-10/1000-PPFL-OV-FT2	10	40	895.3 - 1000	70.28 - 78.5	Teflon	2
	S-10/125-PPFL-OV-FT10	10	40	20.44 - 125	1.604 - 9.813	Teflon	10
	S-10/250-PPFL-OV-FT10	10	40	145.4 - 250	11.42 - 19.63	Teflon	10
	S-10/500-PPFL-OV-FT10	10	40	395.4 - 500	31.04 - 39.25	Teflon	10
	S-10/750-PPFL-OV-FT10	10	40	645.4 - 750	50.67 - 58.88	Teflon	10
	S-10/1000-PPFL-OV-FT10	10	40	895.3 - 1000	70.28 - 78.5	Teflon	10
15 mm ID	S-15/125-PPFL-OV-FT2	15	35	5.13 - 125	0.906 - 22.08	Teflon	2
	S-15/250-PPFL-OV-FT2	15	35	130.1 - 250	22.98 - 44.16	Teflon	2
	S-15/500-PPFL-OV-FT2	15	35	380.1 - 500	67.14 - 88.31	Teflon	2
	S-15/750-PPFL-OV-FT2	15	35	630.1 - 750	111.3 - 132.5	Teflon	2
	S-15/1000-PPFL-OV-FT2	15	35	880.1 - 1000	155.5 - 176.6	Teflon	2
	S-15/125-PPFL-OV-FT10	15	35	5.13 - 125	0.906 - 22.08	Teflon	10
	S-15/250-PPFL-OV-FT10	15	35	130.1 - 250	22.98 - 44.16	Teflon	10
	S-15/500-PPFL-OV-FT10	15	35	380.1 - 500	67.14 - 88.31	Teflon	10
	S-15/750-PPFL-OV-FT10	15	35	630.1 - 750	111.3 - 132.5	Teflon	10
	S-15/1000-PPFL-OV-FT10	15	35	880.1 - 1000	155.5 - 176.6	Teflon	10
25 mm ID	S-25/125-PPFL-OV-FT2	25	24	11.48 - 125	5.632 - 61.33	Teflon	2
	S-25/250-PPFL-OV-FT2	25	24	136.5 - 250	66.96 - 122.7	Teflon	2
	S-25/500-PPFL-OV-FT2	25	24	386.5 - 500	189.6 - 245.3	Teflon	2
	S-25/750-PPFL-OV-FT2	25	24	636.5 - 750	312.3 - 368	Teflon	2
	S-25/1000-PPFL-OV-FT2	25	24	886.5 - 1000	434.9 - 490.6	Teflon	2
	S-25/125-PPFL-OV-FT10	25	24	11.48 - 125	5.632 - 61.33	Teflon	10
	S-25/250-PPFL-OV-FT10	25	24	136.5 - 250	66.96 - 122.7	Teflon	10
	S-25/500-PPFL-OV-FT10	25	24	386.5 - 500	189.6 - 245.3	Teflon	10
	S-25/750-PPFL-OV-FT10	25	24	636.5 - 750	312.3 - 368	Teflon	10
	S-25/1000-PPFL-OV-FT10	25	24	886.5 - 1000	434.9 - 490.6	Teflon	10
35 mm ID	S-35/125-PPFL-OV-FT2	35	18	12.58 - 125	12.095 - 120.2	Teflon	2
	S-35/250-PPFL-OV-FT2	35	18	137.6 - 250	132.3 - 240.4	Teflon	2
	S-35/500-PPFL-OV-FT2	35	18	387.6 - 500	372.7 - 480.8	Teflon	2
	S-35/750-PPFL-OV-FT2	35	18	637.6 - 750	613.1 - 721.2	Teflon	2
	S-35/1000-PPFL-OV-FT2	35	18	887.6 - 1000	853.5 - 961.6	Teflon	2
	S-35/125-PPFL-OV-FT10	35	18	12.58 - 125	12.095 - 120.2	Teflon	10
	S-35/250-PPFL-OV-FT10	35	18	137.6 - 250	132.3 - 240.4	Teflon	10
	S-35/500-PPFL-OV-FT10	35	18	387.6 - 500	372.7 - 480.8	Teflon	10
	S-35/750-PPFL-OV-FT10	35	18	637.6 - 750	613.1 - 721.2	Teflon	10
	S-35/1000-PPFL-OV-FT10	35	18	887.6 - 1000	853.5 - 961.6	Teflon	10
50 mm ID	S-50/125-PPFL-OV-FT2	50	13	10.06 - 125	19.74 - 245.3	Teflon	2
	S-50/250-PPFL-OV-FT2	50	13	135.1 - 250	265.1 - 490.6	Teflon	2
	S-50/500-PPFL-OV-FT2	50	13	385.1 - 500	755.7 - 981.3	Teflon	2
	S-50/750-PPFL-OV-FT2	50	13	635.1 - 750	1246 - 1472	Teflon	2
	S-50/1000-PPFL-OV-FT2	50	13	885.1 - 1000	1737 - 1963	Teflon	2
	S-50/125-PPFL-OV-FT10	50	13	10.06 - 125	19.74 - 245.3	Teflon	10
	S-50/250-PPFL-OV-FT10	50	13	135.1 - 250	265.1 - 490.6	Teflon	10
	S-50/500-PPFL-OV-FT10	50	13	385.1 - 500	755.7 - 981.3	Teflon	10
	S-50/750-PPFL-OV-FT10	50	13	635.1 - 750	1246 - 1472	Teflon	10
	S-50/1000-PPFL-OV-FT10	50	13	885.1 - 1000	1737 - 1963	Teflon	10

# SNAP® Series Glass Columns, SR-Version, Short/Short Plungers

Length may vary slightly based on glass tolerance.

Temperature range 4 - 40 °C  
 Plunger PEEK  
 Sealing Viton or Kalrez®  
 Frit ID 10 - 50 mm: Teflon (2 µm or 10 µm)  
 Piston Configuration Short plungers




	Part No.	ID [mm]	Pressure limit [bar]	Bed length [mm]	Volume [ml]	Frit material	Frit porosity [µm]
10 mm ID	S-10/125-PPSS-OV-FT2	10	40	0 - 125	0 - 9.813	Teflon	2
	S-10/250-PPSS-OV-FT2	10	40	125.9 - 250	9.881 - 19.63	Teflon	2
	S-10/500-PPSS-OV-FT2	10	40	375.9 - 500	29.51 - 39.25	Teflon	2
	S-10/750-PPSS-OV-FT2	10	40	625.9 - 750	49.13 - 58.88	Teflon	2
	S-10/1000-PPSS-OV-FT2	10	40	875.9 - 1000	68.76 - 78.5	Teflon	2
	S-10/125-PPSS-OV-FT10	10	40	0 - 125	0 - 9.813	Teflon	10
	S-10/250-PPSS-OV-FT10	10	40	125.9 - 250	9.881 - 19.63	Teflon	10
	S-10/500-PPSS-OV-FT10	10	40	375.9 - 500	29.51 - 39.25	Teflon	10
15 mm ID	S-15/125-PPSS-OV-FT2	15	35	0 - 125	0 - 22.08	Teflon	2
	S-15/250-PPSS-OV-FT2	15	35	95.26 - 250	16.83 - 44.16	Teflon	2
	S-15/500-PPSS-OV-FT2	15	35	345.3 - 500	60.98 - 88.31	Teflon	2
	S-15/750-PPSS-OV-FT2	15	35	595.3 - 750	105.1 - 132.5	Teflon	2
	S-15/1000-PPSS-OV-FT2	15	35	845.3 - 1000	149.3 - 176.6	Teflon	2
	S-15/125-PPSS-OV-FT10	15	35	0 - 125	0 - 22.08	Teflon	10
	S-15/250-PPSS-OV-FT10	15	35	95.26 - 250	16.83 - 44.16	Teflon	10
	S-15/500-PPSS-OV-FT10	15	35	345.3 - 500	60.98 - 88.31	Teflon	10
25 mm ID	S-25/125-PPSS-OV-FT2	25	24	0 - 125	0 - 61.33	Teflon	2
	S-25/250-PPSS-OV-FT2	25	24	108 - 250	52.97 - 122.7	Teflon	2
	S-25/500-PPSS-OV-FT2	25	24	358 - 500	175.6 - 245.3	Teflon	2
	S-25/750-PPSS-OV-FT2	25	24	608 - 750	298.3 - 368	Teflon	2
	S-25/1000-PPSS-OV-FT2	25	24	858 - 1000	420.9 - 490.6	Teflon	2
	S-25/125-PPSS-OV-FT10	25	24	0 - 125	0 - 61.33	Teflon	10
	S-25/250-PPSS-OV-FT10	25	24	108 - 250	52.97 - 122.7	Teflon	10
	S-25/500-PPSS-OV-FT10	25	24	358 - 500	175.6 - 245.3	Teflon	10
35 mm ID	S-35/125-PPSS-OV-FT2	35	18	0 - 125	0 - 120.2	Teflon	2
	S-35/250-PPSS-OV-FT2	35	18	110.1 - 250	105.9 - 240.4	Teflon	2
	S-35/500-PPSS-OV-FT2	35	18	360.1 - 500	346.3 - 480.8	Teflon	2
	S-35/750-PPSS-OV-FT2	35	18	610.1 - 750	586.7 - 721.2	Teflon	2
	S-35/1000-PPSS-OV-FT2	35	18	860.1 - 1000	827.1 - 961.6	Teflon	2
	S-35/125-PPSS-OV-FT10	35	18	0 - 125	0 - 120.2	Teflon	10
	S-35/250-PPSS-OV-FT10	35	18	110.1 - 250	105.9 - 240.4	Teflon	10
	S-35/500-PPSS-OV-FT10	35	18	360.1 - 500	346.3 - 480.8	Teflon	10
50 mm ID	S-50/125-PPSS-OV-FT2	50	13	0 - 125	0 - 245.3	Teflon	2
	S-50/250-PPSS-OV-FT2	50	13	105.1 - 250	206.3 - 490.6	Teflon	2
	S-50/500-PPSS-OV-FT2	50	13	355.1 - 500	696.9 - 981.3	Teflon	2
	S-50/750-PPSS-OV-FT2	50	13	605.1 - 750	1246 - 1472	Teflon	2
	S-50/1000-PPSS-OV-FT2	50	13	855.1 - 1000	1678 - 1963	Teflon	2
	S-50/125-PPSS-OV-FT10	50	13	0 - 125	0 - 245.3	Teflon	10
	S-50/250-PPSS-OV-FT10	50	13	105.1 - 250	206.3 - 490.6	Teflon	10
	S-50/500-PPSS-OV-FT10	50	13	355.1 - 500	696.9 - 981.3	Teflon	10

# SNAP® Series Glass Columns, SR-Version, Short/Long Plungers

Length may vary slightly based on glass tolerance.

Temperature range 4 - 40 °C  
 Plunger PEEK  
 Sealing Viton or Kalrez®  
 Frit ID 10 - 50 mm: Teflon (2 µm or 10 µm)  
 Piston Configuration Short / Long plungers




	Part No.	ID [mm]	Pressure limit [bar]	Bed length [mm]	Volume [ml]	Frit material	Frit porosity [µm]
10 mm ID	S-10/125-PPSL-OV-FT2	10	40	0 - 125	0 - 9.813	Teflon	2
	S-10/250-PPSL-OV-FT2	10	40	83.38 - 250	6.545 - 19.63	Teflon	2
	S-10/500-PPSL-OV-FT2	10	40	333.4 - 500	26.17 - 39.25	Teflon	2
	S-10/750-PPSL-OV-FT2	10	40	583.4 - 750	45.8 - 58.88	Teflon	2
	S-10/1000-PPSL-OV-FT2	10	40	833.4 - 1000	65.42 - 78.5	Teflon	2
	S-10/125-PPSL-OV-FT10	10	40	0 - 125	0 - 9.813	Teflon	10
S-10/250-PPSL-OV-FT10	10	40	83.38 - 250	6.545 - 19.63	Teflon	10	
S-10/500-PPSL-OV-FT10	10	40	333.4 - 500	26.17 - 39.25	Teflon	10	
S-10/750-PPSL-OV-FT10	10	40	583.4 - 750	45.8 - 58.88	Teflon	10	
S-10/1000-PPSL-OV-FT10	10	40	833.4 - 1000	65.42 - 78.5	Teflon	10	
15 mm ID	S-15/125-PPSL-OV-FT2	15	35	0 - 125	0 - 22.08	Teflon	2
	S-15/250-PPSL-OV-FT2	15	35	52.76 - 250	9.319 - 44.16	Teflon	2
	S-15/500-PPSL-OV-FT2	15	35	302.8 - 500	53.47 - 88.31	Teflon	2
	S-15/750-PPSL-OV-FT2	15	35	552.8 - 750	97.63 - 132.5	Teflon	2
	S-15/1000-PPSL-OV-FT2	15	35	802.8 - 1000	141.8 - 176.6	Teflon	2
	S-15/125-PPSL-OV-FT10	15	35	0 - 125	0 - 22.08	Teflon	10
S-15/250-PPSL-OV-FT10	15	35	52.76 - 250	9.319 - 44.16	Teflon	10	
S-15/500-PPSL-OV-FT10	15	35	302.8 - 500	53.47 - 88.31	Teflon	10	
S-15/750-PPSL-OV-FT10	15	35	552.8 - 750	97.63 - 132.5	Teflon	10	
S-15/1000-PPSL-OV-FT10	15	35	802.8 - 1000	141.8 - 176.6	Teflon	10	
25 mm ID	S-25/125-PPSL-OV-FT2	25	24	0 - 125	0 - 61.33	Teflon	2
	S-25/250-PPSL-OV-FT2	25	24	65.46 - 250	32.121 - 122.7	Teflon	2
	S-25/500-PPSL-OV-FT2	25	24	315.5 - 500	154.8 - 245.3	Teflon	2
	S-25/750-PPSL-OV-FT2	25	24	565.5 - 750	277.4 - 368	Teflon	2
	S-25/1000-PPSL-OV-FT2	25	24	815.5 - 1000	400.1 - 490.6	Teflon	2
	S-25/125-PPSL-OV-FT10	25	24	0 - 125	0 - 61.33	Teflon	10
S-25/250-PPSL-OV-FT10	25	24	65.46 - 250	32.121 - 122.7	Teflon	10	
S-25/500-PPSL-OV-FT10	25	24	315.5 - 500	154.8 - 245.3	Teflon	10	
S-25/750-PPSL-OV-FT10	25	24	565.5 - 750	277.4 - 368	Teflon	10	
S-25/1000-PPSL-OV-FT10	25	24	815.5 - 1000	400.1 - 490.6	Teflon	10	
35 mm ID	S-35/125-PPSL-OV-FT2	35	18	0 - 125	0 - 120.2	Teflon	2
	S-35/250-PPSL-OV-FT2	35	18	57.6 - 250	55.39 - 240.4	Teflon	2
	S-35/500-PPSL-OV-FT2	35	18	307.6 - 500	295.8 - 480.8	Teflon	2
	S-35/750-PPSL-OV-FT2	35	18	557.6 - 750	536.2 - 721.2	Teflon	2
	S-35/1000-PPSL-OV-FT2	35	18	807.6 - 1000	776.6 - 961.6	Teflon	2
	S-35/125-PPSL-OV-FT10	35	18	0 - 125	0 - 120.2	Teflon	10
S-35/250-PPSL-OV-FT10	35	18	57.6 - 250	55.39 - 240.4	Teflon	10	
S-35/500-PPSL-OV-FT10	35	18	307.6 - 500	295.8 - 480.8	Teflon	10	
S-35/750-PPSL-OV-FT10	35	18	557.6 - 750	536.2 - 721.2	Teflon	10	
S-35/1000-PPSL-OV-FT10	35	18	807.6 - 1000	776.6 - 961.6	Teflon	10	
50 mm ID	S-50/125-PPSL-OV-FT2	50	13	0 - 125	0 - 245.3	Teflon	2
	S-50/250-PPSL-OV-FT2	50	13	62.62 - 250	122.9 - 490.6	Teflon	2
	S-50/500-PPSL-OV-FT2	50	13	312.6 - 500	613.7 - 981.3	Teflon	2
	S-50/750-PPSL-OV-FT2	50	13	562.6 - 750	1104 - 1472	Teflon	2
	S-50/1000-PPSL-OV-FT2	50	13	812.6 - 1000	1595 - 1963	Teflon	2
	S-50/125-PPSL-OV-FT10	50	13	0 - 125	0 - 245.3	Teflon	10
S-50/250-PPSL-OV-FT10	50	13	62.62 - 250	122.9 - 490.6	Teflon	10	
S-50/500-PPSL-OV-FT10	50	13	312.6 - 500	613.7 - 981.3	Teflon	10	
S-50/750-PPSL-OV-FT10	50	13	562.6 - 750	1104 - 1472	Teflon	10	
S-50/1000-PPSL-OV-FT10	50	13	812.6 - 1000	1595 - 1963	Teflon	10	



# SNAP® Series Glass Columns, SR-Version, Long/Long Plungers

Length may vary slightly based on glass tolerance.

Temperature range 4 - 40 °C  
 Plunger PEEK  
 Sealing Viton or Kalrez®  
 Frit ID 10 - 50 mm: Teflon (2 µm or 10 µm)  
 Piston Configuration Long plungers



	Part No.	ID [mm]	Pressure limit [bar]	Bed length [mm]	Volume [ml]	Frit material	Frit porosity [µm]
10 mm ID	S-10/125-PPLL-OE-FT2	10	40	0 - 125	0 - 9.813	Teflon	2
	S-10/250-PPLL-OE-FT2	10	40	40.88 - 250	3.209 - 19.63	Teflon	2
	S-10/500-PPLL-OE-FT2	10	40	290.9 - 500	222.83 - 39.25	Teflon	2
	S-10/750-PPLL-OE-FT2	10	40	540.9 - 750	42.46 - 58.88	Teflon	2
	S-10/1000-PPLL-OE-FT2	10	40	790.9 - 1000	62.08 - 78.5	Teflon	2
	S-10/125-PPLL-OE-FT10	10	40	0 - 125	0 - 9.813	Teflon	10
	S-10/250-PPLL-OE-FT10	10	40	40.88 - 250	3.209 - 19.63	Teflon	10
	S-10/500-PPLL-OE-FT10	10	40	290.9 - 500	222.83 - 39.25	Teflon	10
	S-10/750-PPLL-OE-FT10	10	40	540.9 - 750	42.46 - 58.88	Teflon	10
	S-10/1000-PPLL-OE-FT10	10	40	790.9 - 1000	62.08 - 78.5	Teflon	10
15 mm ID	S-15/125-PPLL-OE-FT2	15	35	0 - 125	0 - 22.08	Teflon	2
	S-15/250-PPLL-OE-FT2	15	35	10.26 - 250	1.812 - 44.16	Teflon	2
	S-15/500-PPLL-OE-FT2	15	35	260.3 - 500	45.97 - 88.31	Teflon	2
	S-15/750-PPLL-OE-FT2	15	35	510.3 - 750	90.12 - 132.5	Teflon	2
	S-15/1000-PPLL-OE-FT2	15	35	760.3 - 1000	134.3 - 176.6	Teflon	2
	S-15/125-PPLL-OE-FT10	15	35	0 - 125	0 - 22.08	Teflon	10
	S-15/250-PPLL-OE-FT10	15	35	10.26 - 250	1.812 - 44.16	Teflon	10
	S-15/500-PPLL-OE-FT10	15	35	260.3 - 500	45.97 - 88.31	Teflon	10
	S-15/750-PPLL-OE-FT10	15	35	510.3 - 750	90.12 - 132.5	Teflon	10
	S-15/1000-PPLL-OE-FT10	15	35	760.3 - 1000	134.3 - 176.6	Teflon	10
25 mm ID	S-25/125-PPLL-OE-FT2	25	24	0 - 125	0 - 61.33	Teflon	2
	S-25/250-PPLL-OE-FT2	25	24	22.96 - 250	11.26 - 122.7	Teflon	2
	S-25/500-PPLL-OE-FT2	25	24	273 - 500	133.9 - 245.3	Teflon	2
	S-25/750-PPLL-OE-FT2	25	24	523 - 750	256.6 - 368	Teflon	2
	S-25/1000-PPLL-OE-FT2	25	24	773 - 1000	379.2 - 490.6	Teflon	2
	S-25/125-PPLL-OE-FT10	25	24	0 - 125	0 - 61.33	Teflon	10
	S-25/250-PPLL-OE-FT10	25	24	22.96 - 250	11.26 - 122.7	Teflon	10
	S-25/500-PPLL-OE-FT10	25	24	273 - 500	133.9 - 245.3	Teflon	10
	S-25/750-PPLL-OE-FT10	25	24	523 - 750	256.6 - 368	Teflon	10
	S-25/1000-PPLL-OE-FT10	25	24	773 - 1000	379.2 - 490.6	Teflon	10
35 mm ID	S-35/125-PPLL-OE-FT2	35	18	0 - 125	0 - 120.2	Teflon	2
	S-35/250-PPLL-OE-FT2	35	18	25.1 - 250	24.14 - 240.4	Teflon	2
	S-35/500-PPLL-OE-FT2	35	18	275.1 - 500	264.5 - 480.8	Teflon	2
	S-35/750-PPLL-OE-FT2	35	18	307.6 - 500	295.8 - 480.8	Teflon	2
	S-35/1000-PPLL-OE-FT2	35	18	775.1 - 1000	745.4 - 961.6	Teflon	2
	S-35/125-PPLL-OE-FT10	35	18	0 - 125	0 - 120.2	Teflon	10
	S-35/250-PPLL-OE-FT10	35	18	25.1 - 250	24.14 - 240.4	Teflon	10
	S-35/500-PPLL-OE-FT10	35	18	307.6 - 500	295.8 - 480.8	Teflon	10
	S-35/750-PPLL-OE-FT10	35	18	307.6 - 500	295.8 - 480.8	Teflon	10
	S-35/1000-PPLL-OE-FT10	35	18	775.1 - 1000	745.4 - 961.6	Teflon	10
50 mm ID	S-50/125-PPLL-OE-FT2	50	13	0 - 125	0 - 245.3	Teflon	2
	S-50/250-PPLL-OE-FT2	50	13	20.12 - 250	39.49 - 490.6	Teflon	2
	S-50/500-PPLL-OE-FT2	50	13	270.1 - 500	530.1 - 981.3	Teflon	2
	S-50/750-PPLL-OE-FT2	50	13	520.1 - 750	1021 - 1472	Teflon	2
	S-50/1000-PPLL-OE-FT2	50	13	775.1 - 1000	1511 - 1963	Teflon	2
	S-50/125-PPLL-OE-FT10	50	13	0 - 125	0 - 245.3	Teflon	10
	S-50/250-PPLL-OE-FT10	50	13	20.12 - 250	39.49 - 490.6	Teflon	10
	S-50/500-PPLL-OE-FT10	50	13	270.1 - 500	530.1 - 981.3	Teflon	10
	S-50/750-PPLL-OE-FT10	50	13	520.1 - 750	1021 - 1472	Teflon	10
	S-50/1000-PPLL-OE-FT10	50	13	775.1 - 1000	1511 - 1963	Teflon	10

## Packing Adaptors

Since most columns will be wet or slurry packed, a packing adaptor will be used. SNAP column packing adaptors have a number of advantages. The first is that they are easy to install and remove. Secondly, the packing adaptors have a sufficient pressure rating, appropriate for the columns they are mounted on, allowing for adequate flow conditions. Third, they are the same diameter as the column they are mounted on avoiding issues with turbulent flow at the interface or joining point. All this adds up to ease of use, safe operations and good results!

These consist of a coupling unit and glass body of same column ID as column to be packed.

Packing Adaptor consisting of:

- SNAP® coupling unit (cast resin) with seal ring insert (PTFE)
- AB-Version with two sets (4 pieces) Viton O-rings
- SR-Version with two Kalrez® or Viton O-rings



### Packing Adaptors AB-Version

Part No.	Column ID (mm)	Pressure Rating (bars)
S-10/125-PAK-AB	10	20
S-10/250-PAK-AB	10	20
S-10/500-PAK-AB	10	20
S-10/750-PAK-AB	10	20
S-10/1000-PAK-AB	10	20
S-15/125-PAK-AB	15	17
S-15/250-PAK-AB	15	17
S-15/500-PAK-AB	15	17
S-15/750-PAK-AB	15	17
S-15/1000-PAK-AB	15	17
S-25/125-PAK-AB	25	12
S-25/250-PAK-AB	25	12
S-25/500-PAK-AB	25	12
S-25/750-PAK-AB	25	12
S-25/1000-PAK-AB	25	12
S-35/125-PAK-AB	35	9
S-35/250-PAK-AB	35	9
S-35/500-PAK-AB	35	9
S-35/750-PAK-AB	35	9
S-35/1000-PAK-AB	35	9
S-50/125-PAK-AB	50	6
S-50/250-PAK-AB	50	6
S-50/500-PAK-AB	50	6
S-50/750-PAK-AB	50	6
S-50/1000-PAK-AB	50	6

### Packing Adaptors SR-Version

Part No.	Column ID (mm)	Pressure Rating (bars)
S-10/125-PAK-SR	10	20
S-10/250-PAK-SR	10	20
S-10/500-PAK-SR	10	20
S-10/750-PAK-SR	10	20
S-10/1000-PAK-SR	10	20
S-15/125-PAK-SR	15	17
S-15/250-PAK-SR	15	17
S-15/500-PAK-SR	15	17
S-15/750-PAK-SR	15	17
S-15/1000-PAK-SR	15	17
S-25/125-PAK-SR	25	12
S-25/250-PAK-SR	25	12
S-25/500-PAK-SR	25	12
S-25/750-PAK-SR	25	12
S-25/1000-PAK-SR	25	12
S-35/125-PAK-SR	35	9
S-35/250-PAK-SR	35	9
S-35/500-PAK-SR	35	9
S-35/750-PAK-SR	35	9
S-35/1000-PAK-SR	35	9
S-50/125-PAK-SR	50	6
S-50/250-PAK-SR	50	6
S-50/500-PAK-SR	50	6
S-50/750-PAK-SR	50	6
S-50/1000-PAK-SR	50	6

# SNAP® Series Glass Columns

## Supplied Accessories

### Parts Kit (1/16")

PN: ELS-1/16-KIT

ELS-JR-CFL-CB1KF	[2]	Ferrules, 1/16"
ELS-JR-55050	[2]	Nuts, 1/16"
ELS-FRT	[1]	Frit Ejector
ELS-P621	[2]	M6 adaptors

### Parts Kit (1/8")

PN: ELS-1/8-KIT

ELS-JR-CFL-CB2KF	[2]	Ferrules, 1/8"
ELS-JR-55051	[2]	Nuts, 1/8"
ELS-FRT	[1]	Frit Ejector
ELS-P621	[2]	M6 adaptors

Tubing should be connected to the SNAP Glass Columns with the following screws:

For tubing with 1/16" outer diameter:

ELS-JR-55050	Nut 1/4" - 28G
ELS-JR-CFL-CB1KF	Ferrule, collapsible 1/16"



For tubing with 1/8" outer diameter:

ELS-JR-55051	Nut 1/4" - 28G
ELS-JR-CFL-CB2K	Ferrule, collapsible 1/8"



Recommended to be purchased with column:

ELS-KP311	1/4" - 28 Column Plug
ELS-1522	1/16" 10' length
ELS-1523	1/8" 10' length

## Spare Parts

### Frits [Polyethylene (PE)] for AB Version

Part No.	Column ID (mm)	Porosity (µm)
ELS-10-FR-PE-05	10	5
ELS-10-FR-PE-10	10	10
ELS-15-FR-PE-05	15	5
ELS-15-FR-PE-10	15	10
ELS-25-FR-PE-05	25	5
ELS-25-FR-PE-10	25	10
ELS-35-FR-PE-05	35	5
ELS-35-FR-PE-10	35	10
ELS-50-FR-PE-05	50	5
ELS-50-FR-PE-10	50	10

### Frits [Teflon (TF)] for SR Version

Part No.	Column ID (mm)	Porosity (µm)
ELS-10-FR-TF-02	10	2
ELS-10-FR-TF-10	10	10
ELS-15-FR-TF-02	15	2
ELS-15-FR-TF-10	15	10
ELS-25-FR-TF-02	25	2
ELS-25-FR-TF-10	25	10
ELS-35-FR-TF-02	35	2
ELS-35-FR-TF-10	35	10
ELS-50-FR-TF-02	50	2
ELS-50-FR-TF-10	50	10

### O-Ring [EDPM] for Plungers AB Version

Part No.	Column ID (mm)
ELS-OR-010-E	10
ELS-OR-013-E	15
ELS-OR-117-E	25
ELS-OR-123-E	35
ELS-OR-132-E	50



Frit

### O-Ring [Viton] for Plungers AB/SR Version

Part No.	Column ID (mm)
ELS-OR-010-V	10
ELS-OR-013-V	15
ELS-OR-117-V	25
ELS-OR-123-V	35
ELS-OR-132-V	50



O-Ring


### O-Ring [Kalrez®] for Plungers SR Version

Part No.	Column ID (mm)
ELS-OR-010-K	10
ELS-OR-013-K	15
ELS-OR-117-K	25
ELS-OR-123-K	35
ELS-OR-132-K	50

# Customized Solutions for SNAP® Series Glass Columns

## Cartridge Configuration

The column requires two clamps while in use but not for column storage. The advantage is that the scientist can buy many cartridges and a few clamps. This reduces the overall cost to equip the lab with multiple columns. The cartridges can be stored in the packed and plugged condition and the clamps can then be installed on another column and run immediately.

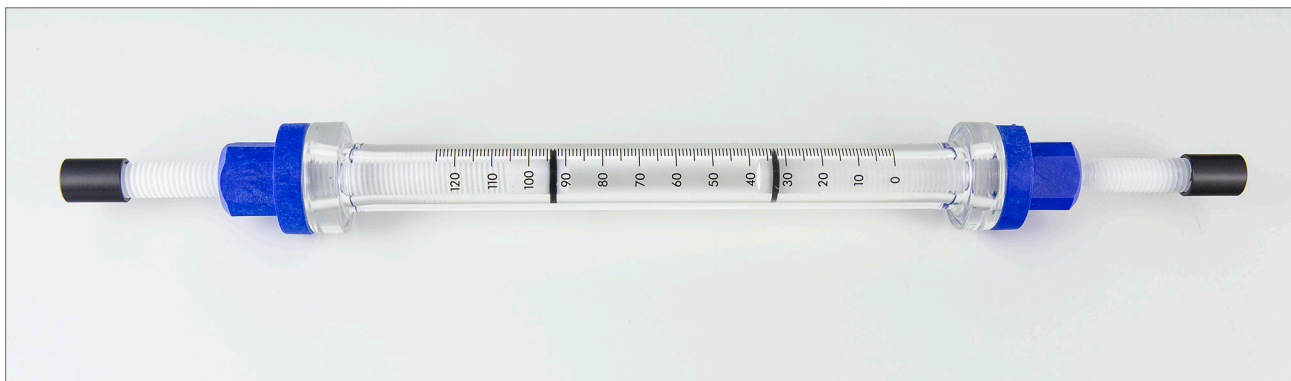

## Customized Solutions

SNAP® columns can be provided with many customizations that the scientist may require including but not limited to:

- Custom column lengths
- Customized material configurations
- Heating and cooling jackets
- Custom end connections
- Any unique specifications upon request

